

09-27-00

A

Patent Application

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Stephen A. Bagshaw

Entitled: METHOD AND SYSTEM FOR ENCRYPTION

Box PATENT APPLICATION
 Assistant Commissioner of Patents
 Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL," Mailing Label No. EL579093977US

Date of Deposit 09/26/00

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box PATENT APPLICATION, Assistant Commissioner of Patents, Washington, D.C. 20231

Typed or Printed Name Martha RochaSignature Martha Rocha

Dear Sir:

REQUEST FOR FILING A NATIONAL PATENT APPLICATION

Transmitted herewith for filing, please find the following:

- X 1. Specification, claims, and abstract of the above-referenced patent application having 21 pages.
- X 2. 4 sheet(s) of drawing(s) (X formal / informal) comprising Figures 1 through 4.
- X 3. Declaration and executed Power of Attorney's (X signed unsigned).
- 3A. No filing fee, Oath, or Declaration is enclosed pursuant to 37 C.F.R. 1.53(d).
- X 4. Information Disclosure Statement along with Form PTO-1449 and references.
5. This is a: Continuation-In-Part; Divisional; Continuation; substitute Application (MPEP 201.09) of Application Serial No. filed ; reissue of U.S. Patent No. filed on .
- An extension to extend the life of the above prior Application to at least the date of filing hereof
(One box must be marked)
- (a) is concurrently being filed in that prior Application,
 (b) was previously filed in that prior Application,
 (c) is not necessary for copendency.

Patent Application

X 6. Attached is an assignment to ATI International, SRL. Please return the recorded assignment to the undersigned.

___ 7. Priority is claimed under 35 U.S.C. § 119 based on filing in _____.

	<u>Application No.</u>	<u>Filing Date</u>
(1)	___	___
(2)	___	___
(3)	___	___

___ (No.) Certified copy (copies) ___ are attached; or ___ were previously filed on ___.

___ 8. Attached: ___ (No.) verified statement(s) establishing "small entity" status under 37 CFR § 1.9 and 1.27.

X 9. Attached:

X Return Postcard
___ (Other)

___ 10. Preliminary Amendment:

Prior to a first Office Action, kindly amend the Application as follows:

Patent Application

11. The following Filing Fee calculation is based on the claims filed less any claims canceled by the Preliminary Amendment of Item 10.

				SMALL ENTITY RATE		LARGE ENTITY RATE		
BASIC FEE				\$345	OR	\$690	=	\$690.00
	NUMBER FILED		NUMBER EXTRA					
TOTAL CLAIMS	35 -20	-	15 (at least 0)	x 9	OR	x 18	=	\$270.00
INDEP. CLAIMS	3 -3	=	0 (at least 0)	x 39	OR	x 78	=	\$ 00.00
If any <u>proper</u> multiple dependent claim (ignore improper) is present (Enter \$0.00 if this is a <u>reissue</u> application)				+\$130	OR	+\$260	=	+\$
If assignment is x'd (item 6), add recording fee \$40.00								+\$ 40.00
Attached is a Rule 47 Petition (inventor refuses to sign or cannot be reached) \$130								+\$
TOTAL FILING FEE								= \$1,000.00

12. A check in the amount of ___ to cover the Filing Fee calculated in Item 11 is attached. Please charge any deficiency or credit any overpayment to ATI Technologies, Inc., PLC Deposit Account No. 50-0441.
- X 13. Please charge **ATI TECHNOLOGIES, INC.**, Deposit Account No. 50-0441 in the amount of \$1,000.00 the Filing Fee calculated in Item 11. This sheet is attached in duplicate.
- X 14. The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and may be required under 37 CFR 1.16-1.18 (missing or insufficiencies only) now or hereafter relative to this application and for the resulting Official Document under 37 CFR 1.20, and to have and cause any necessary petition for extension of time to be filed and any fees necessary to be paid for said extension of time OR credit any overpayment to ATI TECHNOLOGIES, INC., Deposit Account No. 50-0441, for which purpose a duplicate copy of this sheet is attached.

Patent Application

Respectfully submitted,
STEPHEN A. BAGSHAW

9-26-2000
Date

J. Gustav Larson
J. Gustav Larson
Reg. No. 39,263

SIMON, FAKHOURY, TANGALOS, FRANTZ & GALASSO, PLC.
P.O. Box 26503
Austin, Texas 78755-0503
Telephone: (512) 336-8957
Facsimile: (512) 336-9155

PATENT APPLICATION
ATI000092

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

FILING OF A UNITED STATES PATENT APPLICATION

METHOD AND SYSTEM FOR ENCRYPTION

INVENTOR:

Stephen A. Bagshaw
90 Kirk Drive
Thonhill, Ontario L3T 3L2

ATTORNEY OF RECORD
J. GUSTAV LARSON

SIMON, FAKHOURY, TANGALOS, FRANTZ & GALASSO, PLC
P.O. Box 26503
Austin, TX 78755-0503
PHONE (512) 336-8957
FAX (512) 336-9155

ATI000092

METHOD AND SYSTEM FOR ENCRYPTION

Field Of The Invention

5 The present invention relates generally to information handling systems and more particularly to encrypting communications within an information handling system.

Background Of The Invention

10 The entertainment industry is involved in a continual struggle to keep movies from being illegally copied. Unfortunately, the same technological advances that have made distributing high quality movies easier, have made high quality illegal copies easier to produce. Of particular concern is the copying of high-bandwidth digital video content such as DVDs. Various methods have been employed to protect the content of DVDs from being
15 copied illegally. One such method has been to equip DVD players with Macrovision, or a similar copy protection system. Common copy protection systems allow a media player to detect connections to multiple recording devices, and to scramble or otherwise alter the video data so that quality copies cannot be made. Because of the importance of preventing high quality copies from being made, a more secure form of copy protection, known as
20 Content Scrambling System (CSS), was developed. Using CSS, the content of a DVD is encrypted, allowing the content of the DVD to be read only through the use of an encryption key stored on the DVD and a decryption key stored on the DVD player.

25 The use of encryption to protect DVDs from being illegally copied has been used much more frequently as DVD use has expanded. Many computers are being sold with built-in DVD drives and software players. While the content of the video and audio data in the DVD is encrypted, once the DVD player software has decoded the content, the content is decrypted and unsecured. Video controllers can be made with stored encryption keys that

correspond to encryption keys on digital displays, allowing the content between the video controller and the display to be encrypted; however, installing a unique set of encryption keys during the production of the video controller hardware can be expensive. Furthermore, no insurance can be made of the security of data between the system's software and the video controller, within the information handling system.

Brief Description Of The Drawings

Various objects, advantages, features and characteristics of the present invention, as well as methods, operation and functions of related elements of structure, and the combination of parts and economies of manufacture, will become apparent upon consideration of the following description and claims with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures, and wherein:

FIG. 1 is a block diagram illustrating an information handling system with an interfaced display, featuring key components according to at least one embodiment of the present invention;

FIG. 2 is a chart illustrating a method of authenticating secure connections between an information handling system and a display, according to at least one embodiment of the present invention;

FIG. 3 is chart illustrating a method to secure communications between a software video driver and a video controller, according to at least one embodiment of the present invention; and

FIG. 4 is a flow chart illustrating a method of authenticating secure communications between a video controller and a display.

Detailed Description Of The Figures

At least one embodiment of the present invention provides a method for establishing an encrypted link between a peripheral device and a software component, as part of an information handling system. The method comprises generating a first seed key common to both the peripheral device and the software component. The method also includes providing the first seed key and a public encryption key associated with the peripheral device to a hardware controller. The method further includes generating in the hardware controller, using the first seed key and the public encryption key, a second seed key, different from the first seed key. The second seed key is used to encrypt communications between the software component and the hardware controller. An advantage of at least one embodiment of the present invention is that communications between a software component in an information handling system and a hardware controller can be secured using encryption unique to a software component and peripheral device combination. Another advantage of at least one embodiment of the present invention is that by downloading encryption keys from a network, eliminating the need to install multiple sets, or a unique set, of encryption keys on hardware controllers, production costs of hardware controllers can be reduced.

Referring now to FIG. 1, a display is shown as part of an information handling system containing a software component, through a video controller, according to at least one embodiment of the present invention. Secure connections can be established between a software component, such as video driver 123, a video controller 140, and a display 150. Video driver 123 monitors and controls the flow of data, such as digital video disk (DVD) data to display 150 connected to video controller 140, dependent on whether the secure connection is maintained. In one embodiment of the present invention, display 150 is a digital video interface (DVI) compliant display which is connected to system 110, using a DVI interface 158 connected to a DVI connector 148. However, in at least one

embodiment, display 150 can also be another type of display, a repeater with a plurality of displays connected to it or any other peripheral device used to transfer data.

When a DVD is being played through a DVD player connected to system 110, the content of the DVD can be read using a DVD drive and DVD player software (not shown). The DVD data is sent to a software component, such as video driver 123, run in memory 120 by a central processing unit (CPU) 130. Video driver 123 transmits a software public key 126 to the connected display 150. Software public key 126 can be loaded from a basic input/output system (BIOS) chip. Alternatively, software public key 126 and any necessary private keys 127 can be downloaded from a network, such as the Internet 170, through a communications interface 135. The key is sent over peripheral component interconnect (PCI) bus 137. PCI bus 137 can also be used to communicate with other devices in system 110, such as an audio card (not shown), communications interface 135, etc. It will be appreciated that other internal bus types may be used, such as the Video Electronic Standards Association local bus (VLB), the industry standard architecture (ISA) bus, or the extended ISA (EISA) bus, without departing from the spirit or scope of the present invention.

Display 150 also transmits its public key, monitor public key 156, to video driver 123, through video controller 140. In one embodiment, video driver 123 checks monitor public key to determine if it is on a list of revoked keys. If the key has been revoked or it is not transmitted, a value can be written into register HDCP_AUTHORIZED to indicate that display 150 is not authorized for secure communications. If the device connected to DVI connector 148 is a repeater (not shown) connected to a plurality of displays, the key of each display is preferably monitored to ensure that they are all authorized for secure communications.

When video driver 123 receives monitor public key 156, it uses that key to select from private keys 127, as is described subsequently in FIG. 2. The chosen private keys are then added together. This summation generates a secret seed key, K_m which can be used for authentication and encryption. Video driver 123 sends the value of K_m to video controller 140, where it is stored in registers HDCP_DATA_UPPER 144 and HDCP_DATA_LOWER 146. A manipulation of K_m , such as through an orthogonal transformation, is performed to generate another value, R_0 . In one embodiment, K_m is loaded into a least first shift register and a known number of clock cycles is applied to the LFSR. Select bits output from the LFSR are used to generate R_0 . R_0 can be stored in memory 120, or in a temporary register, such as register 141.

When display 150 receives software public key 126, it uses that key to select from private keys 157. The chosen private keys are added together to generate a secret seed key, K_m' which can be used for authentication. Manipulation is performed on K_m' , as was discussed for generating R_0 from K_m , to generate a value R_0' . Display 150 transmits the R_0' value to video controller 140.

Video controller 140, under the control of processing circuit 145, can compare the stored R_0 and R_0' values. If display 150 is an authorized display, K_m and K_m' should be the same value and R_0 and R_0' should be equal. If the values are not equal, video controller 140 can terminate communications, continue trying to find an authorized connection, or simply notify video driver 123 of the unauthenticated condition. If R_0 and R_0' are equal, display 150 is considered authenticated, and a value is written to register HDCP_CONTROL 142 to indicate that authentication is complete. Once the display is authenticated, video controller 140 is left to handle authentications of the secure connection with display 150. If display 150 is removed or another display is connected, it is the job of video controller 140 to notify video driver 123 so that software can update communications status accordingly, and take any necessary actions, such as terminating communications with display 150.

Authentication, encryption, and other functions performed by video controller 140, can be performed using processing circuit 145. In one embodiment, processing circuit 145 is a hardware circuit, or collection of circuits, dedicated to encrypting and decrypting information, while in other embodiments, processing circuit 145 is a microcontroller or other processor that is used in conjunction with appropriate software to perform a wide variety of functions on video controller 140.

Communication along PCI bus 137, between video driver 123 and video controller 140 is preferably encrypted. In one embodiment, the value of Km (supplied by video driver 123) is combined with the value of monitor public key 156 by rearranging the bits of the combined value in a predefined ordering. The combination can be performed using a simple summation. The combination of the values of Km and monitor public key 156 can be used to generate an encryption key, herein referred to as the PCI key. Video controller 140 and video driver 123 can encode transmissions between each other on PCI bus 137 through a mathematical transformation, such as an orthogonal transform involving the PCI key. In one embodiment, an exclusive OR (XOR) calculation is performed between the data to be transmitted and the PCI key to encode transmissions. Since both video controller 140 and video driver 123 have knowledge of the PCI key, data between them can be encoded, transferred, and decoded.

Communication of non-video data between display 150 and video controller 140 is handled through DVI connector 148 and DVI interface 158 using an I²C compliant display data channel (DDC) line. It will be appreciated that other suitable communication protocols and corresponding hardware may be used according to the objectives of the present invention.

Since communication of control values between 140 and 150 are not encrypted in any form, an orthogonal transform can be used to encrypt communications between video

driver 123 and video controller 140, using a dynamic encryption key. In at least one embodiment, the original key used for orthogonal encryption is the PCI key. If orthogonal encryption with a dynamic key is implemented, the PCI key can be altered periodically by applying a predetermined transform or a suitable mathematical algorithm to the value of the PCI key. For example, once data is decoded, a new encryption key can be generated using a combination of the value of Km with the decoded data. Using a dynamic encryption key, the communicating devices, such as video driver 123 and video controller 140, or display 150 and video controller 140, alter the encryption keys to provide added security. Alternatively, the function used for the orthogonal encryption can be dynamically altered to change the encryption scheme.

In one embodiment of the present invention, after an orthogonal encrypted link has been established on PCI bus 137, video driver 123 can send software public key 126 and an encrypted private decryption key, downloaded from the Internet 170, to video controller 140, through PCI bus 137. Monitor public key 156 can also be sent to video controller 140, through DVI connector 148, by display 150. After receiving all the necessary encryption and decryption keys, video controller 140 can use the encryption keys to implement public key encryption. Keys associated with video controller 140 can also be downloaded from a network, such as the Internet, to initiate public key encryption between video driver 123 and video controller 140.

Referring now to FIG. 2, a diagram is shown illustrating the steps taken during the authentication of a display. When initiating communications with a display, a video driver can initiate and execute the steps describe in FIG. 2 to insure that the display is authorized for secure communications.

In step 210 an information handling system transmits a public key associated with its video driver, to a connected display. The public key will be referred to as key selector

vector-A (AKSV). In step 235, AKSV is retrieved by the connected display. In step 240, the connected display uses the placement of binary 1's in AKSV to choose a subset of private keys from a stored collection of private keys located in the display. For example, if the location of 1's in AKSV are in the 0th, 4th, and 5th bit locations, as in the hexadecimal value 0x31 (110001 in binary), the display would choose the 0th, 4th, and 5th private keys stored in an indexed array in the display. In one embodiment, AKSV is a 40-bit value with 20 1's and 20 0's, allowing the display to select 20, 56-bit private keys. It will be appreciated that the size of the keys used can be altered without departing from the scope of the invention. The selected private keys are preferably summed together, generating a secret seed key, K_m' . In step 245, the lower K_m' value is manipulated to form another 16-bit value R_0' . In step 270, R_0' is transmitted to the information handling system. R_0' can be encoded before being transmitted to the information handling system, such as through an orthogonal transform with the display's public key or the calculated seed key, K_m' . In another embodiment, R_0' would not need to be encoded.

The connected display also transmits its public key, as in step 230. The display's public key will be referred to as the key selector vector-B (BKSV). In step 215, the information handling system retrieves BKSV. In step 220, the information handling system employs similar steps as the display's step 240 to calculate a secret seed key. The information handling system uses the connected display's public key, BKSV, to choose among its stored private keys. The information handling system chooses its private keys dependant on the locations of 1's in the binary value of BKSV. For example, if the location of 1's in BKSV are in the 0th, 2nd, and 4th bit locations, as in the hexadecimal value 0x15 (10101 in binary), the display would choose the 0th, 2nd, and 4th private keys stored in an indexed array in the information handling system. BKSV can be a 40-bit value with 20 1's and 20 0's, allowing the display to select 20 private keys. The selected private keys are preferably summed together, generating a secret seed key, K_m . In step 225, the information handling system generates a 16-bit value, R_0 through an orthogonal transformation of K_m .

In one embodiment of the present invention, the sets of encryption keys associated with the information handling system are downloaded from a network, such as the Internet.

In step 280, the information handling system receives R_0' from the display. The R_0' is transmitted to the video controller 140. If R_0' is encrypted or encoded, the information handling system can follow any necessary steps to decrypt or decode R_0' . In step 290, the stored R_0 (taken from the seed key K_m transmitted by the video driver) is compared to the received R_0' , in the information handling system. If the connected display is an authorized display and the private keys and the public key are authorized, the calculated seed values, K_m and K_m' should be equal. For example, in the described embodiment, if the 0th, 2nd, and 4th private keys of the video driver were hexadecimal values 0x23, 0xA2, and 0x30, respectively, the value of K_m would be $0x23 + 0xA2 + 0x30$, or 0xF5. If the display were an authorized display with 0th, 4th, and 5th private keys having hexadecimal values of 0x21, 0x31, and 0xA3, respectively, K_m' would equal $0x21 + 0x30 + 0xA3$, or 0xF5. Thus, if the connected display is authorized, the calculations of K_m and K_m' should result in equal values.

Once, the video controller compares the value of R_0' to R_0 , video controller 140 (FIG. 1) provides video driver 123 (FIG. 1) with the results of the comparison. If K_m and K_m' are equal, R_0 and R_0' should also be equal. If R_0 and R_0' are not equal, the connected display is considered unauthorized and the video driver preferably does not send video data to the connected display; however, if R_0 and R_0' are equal, the video driver considers the display authorized and allows the video data to be transmitted to the display. Alternatively, if no data is received by the information handling system, as in steps 215 and 280, the connected device is automatically considered unauthorized. In a preferred embodiment, a software video driver performs most of the authorization in the information handling system. Once the display is considered authorized, the video driver turns over further

authentication to a hardware video controller, allowing the software and other system resources to be freed for other tasks.

Referring now to FIG. 3, a diagram of the steps used to perform secured connections between a software video driver and a hardware video controller are shown, according to one embodiment of the present invention. Communication between the video driver and the video controller is preferably encoded with a secret key.

In step 310, the video driver generates a secret key, hereinafter referred to as the PCI key, for encoding communications over the PCI bus. The video driver combines the secret seed key, K_m , with a display's public key, key selection vector-B (BKSV). The video driver can generate the PCI key by concatenating the K_m and BKSV values and rearranging the ordering of bits in a predefined ordering. Alternatively, the video driver can perform other functions, such as multiplication or another suitable transform, to generate the PCI key from K_m and BKSV. In step 320, the video driver transmits the PCI key to the video controller over the peripheral component interconnect (PCI) bus. In step 330, the video controller receives the PCI key from the video driver, through the PCI bus. In step 340, the video controller uses the PCI key to encode and decode messages sent to and from the video driver. In step 350, the video driver also uses the PCI key to encode and decode messages to and from the video driver. The PCI key can be dynamic. Both the video driver and the video controller use an orthogonal transform with the PCI seed to encode their messages over the PCI bus. In one embodiment of the present invention, after an encrypted link is established over the PCI bus, the software video driver can securely transfer sets of encryption keys and a private decryption key, downloaded from a network, to establish public key communications with display 150.

Referring now to FIG. 4, a flow chart illustrating authentication between a video controller and a display are shown, according to one embodiment of the present invention.

Communication between the video controller and a display is performed to continually verify the security of authenticated devices connected to the video controller.

5 In step 420, the display transmits R_0' to the video controller. In one embodiment, the display transmits the R_0' once for every 128 frames displayed. The transmission is preferably sent over the digital data channel (DDC) line on the video controller's digital video interface (DVI) connector, using I²C. protocols. In another embodiment, the display can encode R_0' by performing a transform using the display's public key. Alternatively, the display can perform the transform using its calculated seed key, K_m' . In addition, other
10 methods can be performed to encode R_0' without departing from the scope of the present invention.

15 In step 430, the video controller receives R_0' through the DDC line. In step 450, the video controller compares the received R_0' to the stored R_0 , taken from the seed key (K_m), sent by the video driver. It will be appreciated that step 450 can be performed by the video driver in place of the video controller. If R_0' is not equal to R_0 , the display is either not an authorized display, the connection to the display has been terminated, or another display has been connected. In step 470, if R_0' is not equal to R_0 , the video driver is informed of the insecure connection. The video controller can then send the video data to the display
20 unencrypted, allowing it to be displayed, or the video driver can disable the video transmission to the video controller, only allowing secured displays to be used. Devices other than displays can be connected to the video controller. Alternatively, a repeater can be connected to the video controller. A repeater can be used to transmit video to a plurality of displays. If a repeater is used, the repeater preferably transmits key selector vectors from
25 each of the plurality of displays to the video controller for authentication.

The preceding descriptions have shown embodiments of the present invention used to authenticate secure communications between an information handling system with a

video controller and a single connected display. Authentication described herein can be performed with other types of connected devices. The present invention can also be performed to securely communicate with a plurality of connected displays, such as through an authorized video repeater with a plurality of connected devices. An embodiment of the present invention can also be implemented in systems other than computers, and can be used to control the transmission of digital data other than video data. For example, at least one embodiment of the present invention could be implemented in a compact disc (CD) player, or in other devices that might benefit from encrypted information transfer. It should now be appreciated by those skilled in the art that the present invention has the advantage that increased security can be achieved by providing for authentication between a software driver and a hardware controller. Another advantage, of at least one embodiment of the present invention, is that encryption can be performed based on an encryption key unique to the software driver and peripheral device combination.

In the preceding detailed description of the preferred embodiments, reference has been made to the accompanying drawings, which form a part thereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical, chemical and electrical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the invention, the description may omit certain information known to those skilled in the art. Furthermore, many other varied embodiments that incorporate the teachings of the invention may be easily constructed by those skilled in the art. Accordingly, the present invention is not intended to be limited to the specific form set forth herein, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents, as can be reasonably included within the spirit and scope of the invention.

The preceding detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

09669339-09669339

WHAT IS CLAIMED IS:

1. A method comprising:

establishing an encrypted link between a peripheral device and a software component of an information handling system, wherein establishing the encrypted link includes generating a first seed key common to both the peripheral device and the software component; providing the first seed key and a public encryption key associated with the peripheral device to a hardware controller; and generating in the hardware controller, using the first seed key and the public encryption key, a second seed key different from the first seed key, the second seed key to encrypt communications between the software component and the hardware controller.

2. The method as in Claim 1, wherein generating the first seed key is performed by the software component.

3. The method as in Claim 2, wherein generating the first seed key includes:

using the public encryption key associated with the peripheral device to select a plurality of private encryption keys associated with the software component; and determining the seed key based upon the selected private keys associated with the software component.

4. The method as in Claim 1, wherein generating the first seed key is performed by the peripheral device.

- 1 5. The method as in Claim 4, wherein generating the first seed key includes:
2 using the public encryption key associated with the software component to select from a
3 plurality of private encryption keys associated with the peripheral device; and
4 summing the select private keys associated with the peripheral device.

- 1 6. The method as in Claim 1, wherein establishing an encrypted link includes performing
2 orthogonal encryption of data transmitted to and from the hardware controller.

1 7. The method as in Claim 6, further including:

2 providing the public encryption key associated with the peripheral device and a private
3 decryption key, associated with the software component, to the hardware
4 component; and

5 providing public key encryption between the hardware controller and the
6 peripheral device.

1 8. The method as in Claim 6, wherein the orthogonal encryption is performed using an
2 orthogonal encryption key, wherein the orthogonal encryption key is capable of changing
3 dynamically.

1 9. The method as in Claim 6, wherein the orthogonal encryption is performed using an
2 orthogonal transform function, wherein the orthogonal transform function is capable
3 of changing dynamically.

1 10. The method as in Claim 1, wherein the hardware controller is a video controller.1.

1 11. The method as in Claim 1, wherein the peripheral device is a display device.2.

1 12. The method as in Claim 1, wherein the step of establishing further includes the first
2 seed key being based upon the peripheral device and the information handling system.

1 13. The method as in Claim 12, wherein the first seed key is unique to the peripheral device
2 and the information handling system.3.

1 14. A hardware controller comprising:

- 2 a bus connection to receive a first seed key from a software component within an
3 information handling system;
4 a digital communications connector to connect to a peripheral device and to receive
5 a public encryption key from said peripheral device;
6 a first set of registers to store said first seed key, said first seed key common to both
7 said information handling system and said peripheral device;
8 a second register to store said public encryption key; and
9 a processing circuit to generate, using said first seed key and said public
10 encryption key,
11 a second seed key different from said first seed key, said second seed key
12 to encrypt communications between said software component and said
13 hardware controller.

1 15. The hardware controller as in Claim 14, wherein said information handling
2 system generates said first key and wherein generation of said first key includes:
3 using said public encryption key to select a plurality of private encryption keys; and
4 combining said selected private encryption keys.

1 16. The hardware controller as in Claim 14, wherein communications between said
2 hardware controller and said information handling system are performed
3 over a system bus.

1 17. The hardware controller as in Claim 16, wherein said system bus is a Peripheral
2 Component Interconnect bus.

1 18. The hardware controller as in Claim 14, wherein said digital communications
2 connector is a Digital Video Interface connector.

1 19. The hardware controller as in Claim 14, wherein said hardware controller is a video
2 controller.

1 20. The hardware controller as in Claim 14, wherein said peripheral device is a display
2 device.

1 21. The hardware controller as in Claim 14, wherein encryption is performed using an
2 orthogonal transform.

1 22. The hardware controller as in Claim 21, wherein the orthogonal transform is
2 performed using an orthogonal encryption key, said orthogonal encryption key
3 capable of changing dynamically.

1 23. The hardware controller as in Claim 21, wherein the orthogonal transform is
2 performed using an orthogonal transform function, said orthogonal transform
function capable of changing dynamically.

- 1 24. A system comprising:
2 a processor coupled to a system bus;
3 memory coupled to said system bus for use by said processor;
4 a collection of instructions to be stored in said memory and executed by said
5 processor, said collection of instructions including instructions to establish an
6 encrypted link between said system and a peripheral device, wherein establishing
7 said encrypted link includes generating a first seed key common to both said
8 peripheral device and said system, said collection of instructions further
9 including instructions to deliver said first seed key to a peripheral controller; and
10 a peripheral controller including a bus connection to receive said first seed key;
11 a digital communications link to connect to said peripheral device and to receive a
12 public encryption key from said peripheral device;
13 a first set of registers to store said first seed key;
14 a second register to store said public encryption key; and
15 a processing circuit to generate, using said first seed key and said public encryption
16 key, a second seed key different from said first seed key, said second seed key
17 to encrypt communications between said system and said peripheral controller.
- 1 25. The system as in Claim 24, wherein said memory includes random access memory and
2 read-only memory.20.
- 1 26. The system as in Claim 24, wherein generating a first seed includes:
2 using said public encryption key to select a plurality of private encryption keys; and
3 combining said selected private encryption keys.

PATENT APPLICATION

1 27. The system as in Claim 26, wherein said public encryption key and said plurality of
2 private encryption keys are located in said memory.

1 28. The system as in Claim 24, wherein said system bus is a Peripheral Component
2 Interconnect bus.

1 29. The system as in Claim 24, wherein said digital communications link is a Digital Video
2 Interface connector.

1 30. The system as in Claim 24, wherein said peripheral controller is a video controller.

1 31. The system as in Claim 24, wherein said peripheral device is a display device.

1 32. The system as in Claim 24, wherein encryption is performed using an orthogonal
2 transformation.


1 33. The system as in Claim 32, wherein the orthogonal transform is performed using an
2 orthogonal encryption key, said orthogonal encryption key capable of changing
3 dynamically.

1 34. The system as in Claim 32, wherein the orthogonal transform is performed using an
2 orthogonal transform function, said orthogonal transform function capable of changing
3 dynamically.

1 35. The system as in Claim 24, wherein the digital communications link is to receive a
2 public encryption key from said peripheral device and to transmit encrypted digital data
3 to said peripheral device.

METHOD AND SYSTEM FOR ENCRYPTION**Abstract Of The Disclosure**

5 A method and systems are provided for creating an authentication of secure communications between a software video driver and a video display. A video driver transmitting digital video data deemed high-bandwidth digital content, to a display, can perform authentication to determine if a secure connection has been established with a display. The video driver and the display both generate secret keys which are compared to ensure that the display used is authorized for secure communications. The video driver, communicating with a hardware video controller over a peripheral component interconnect (PCI) bus, can establish an encrypted link with the video driver. The video driver occasionally monitors the display to determine if a secure communications link is upheld. If the connection is determined at any time to be insecure, the video controller can alert the video driver, so that transmission of the video data can be terminated.

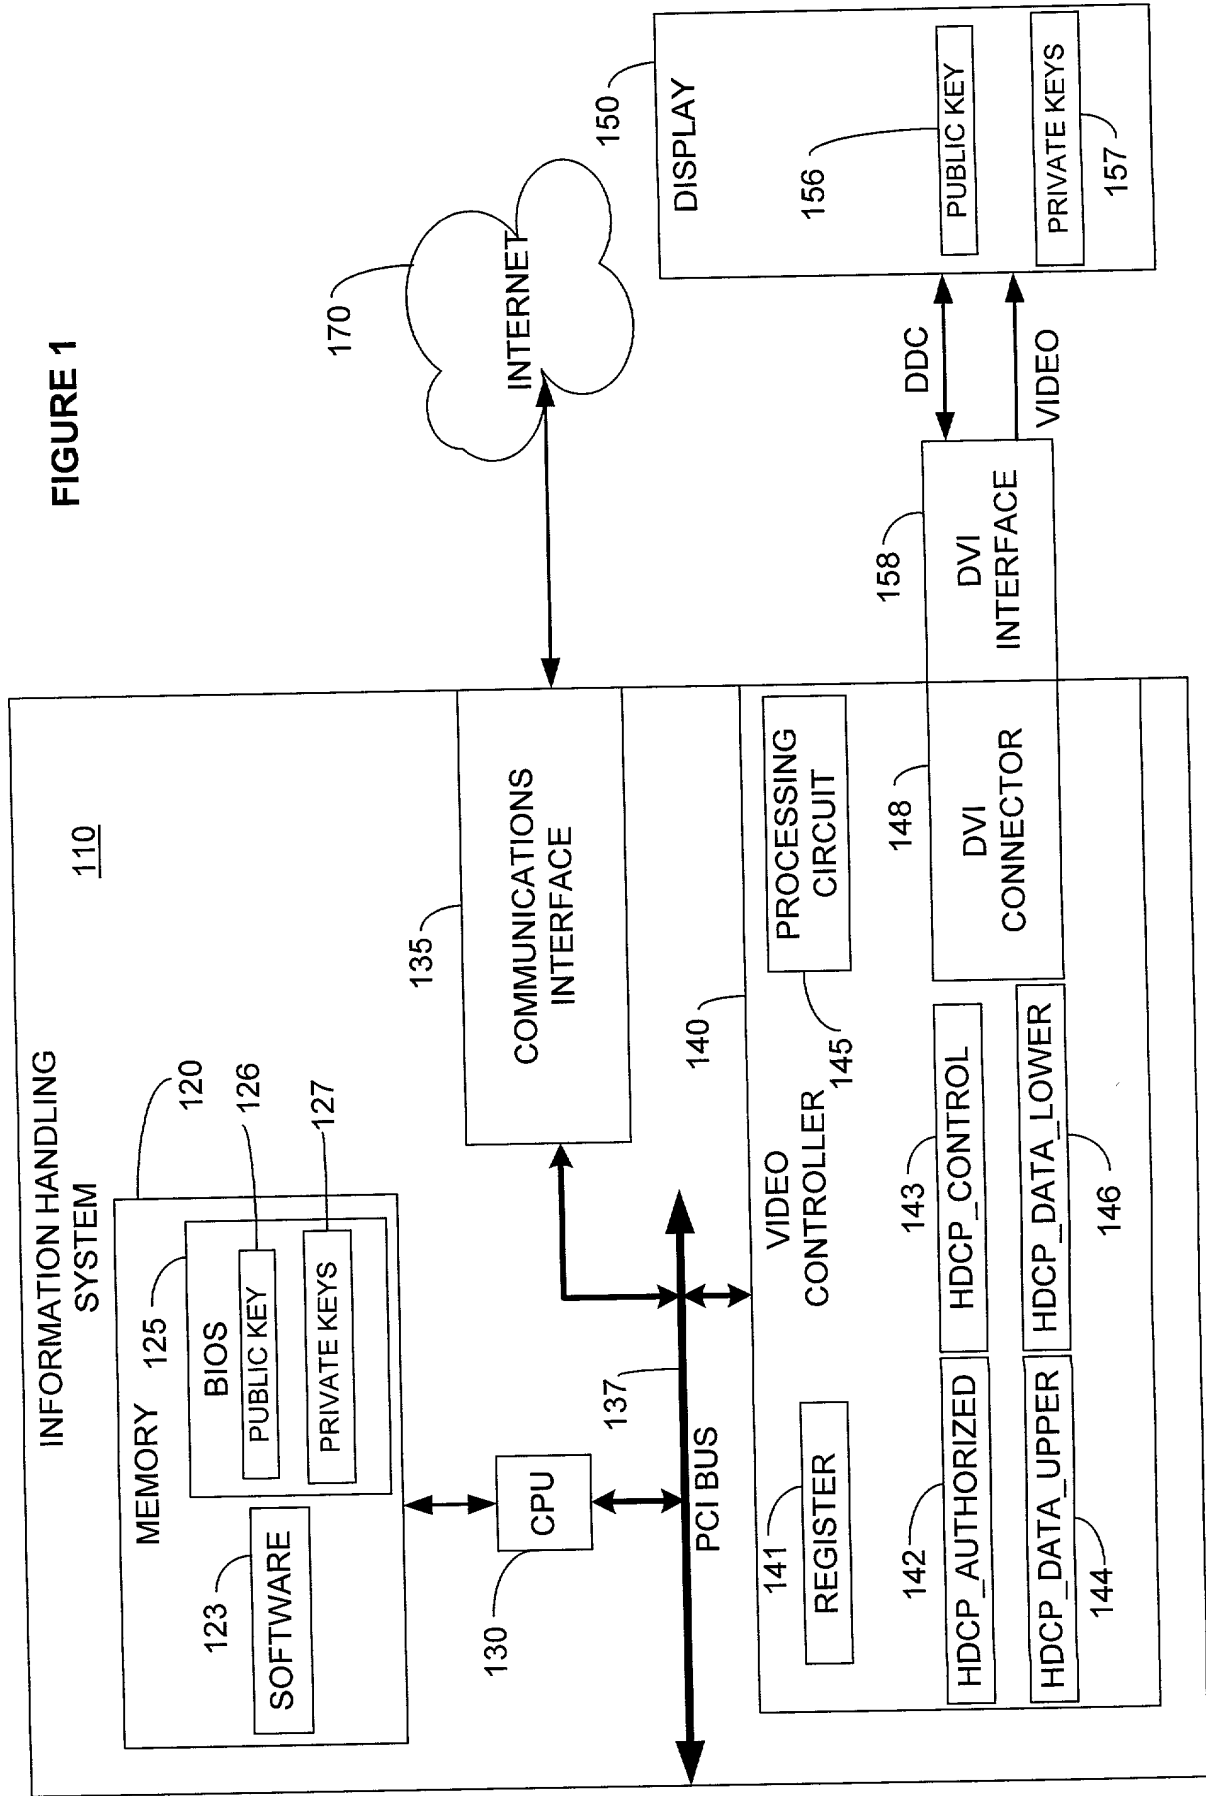

[illegible]

FIGURE 2

COMMUNICATION
BETWEEN SOFTWARE
DRIVER AND VIDEO
CONTROLLER

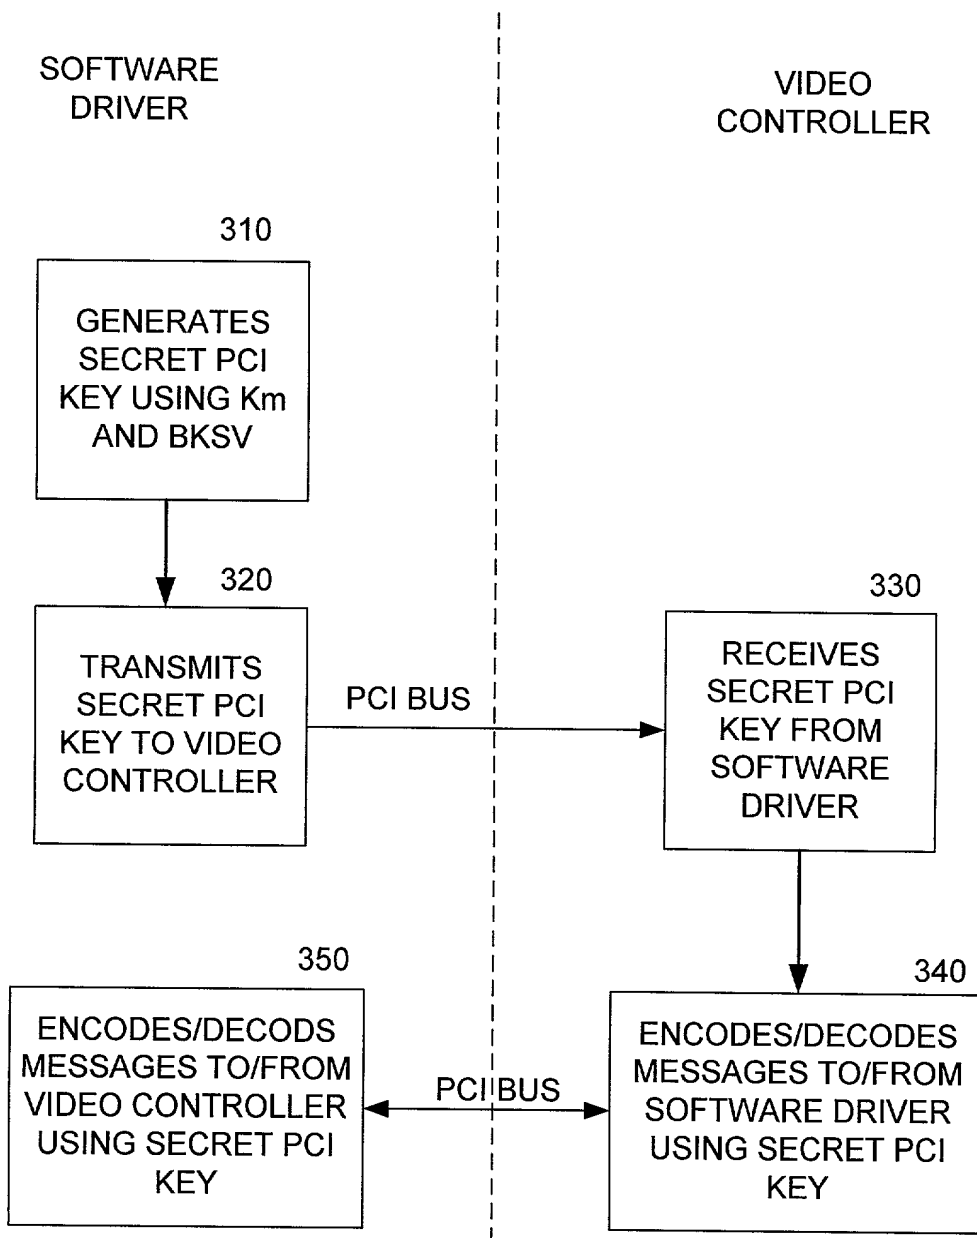


FIGURE 3

COMMUNICATION
BETWEEN VIDEO
CONTROLLER AND
DISPLAY

VIDEO CONTROLLER

DISPLAY

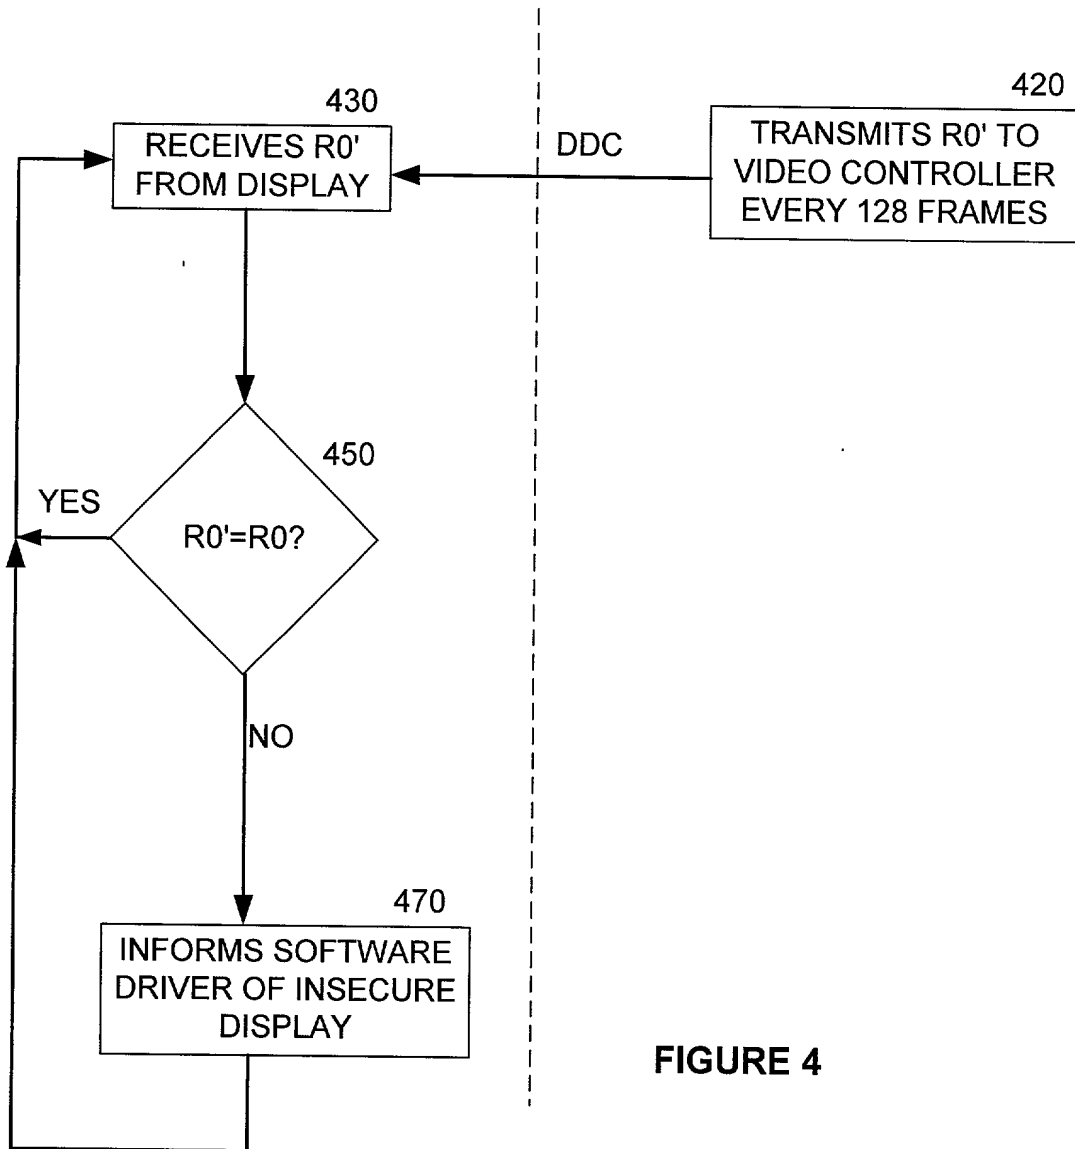


FIGURE 4

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND SYSTEM FOR ENCRYPTION**, the specification of which: (mark only one)

- X (a) is attached hereto.
 (b) was filed on XXXXXXXX as Application Serial No. XXXXXXXXXXXX and was amended on (if applicable)
 (c) was filed as PCT International Application No. on and was amended on (if applicable).
 (d) was filed on as Application Serial No. and was issued a Notice of Allowance on .
 (e) was filed on and bearing attorney docket number .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this CIP application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

<u>PRIOR FOREIGN PATENTS</u>						
<u>Number</u>	<u>Country</u>	<u>Month/Day/Year Filed</u>	<u>Date first laid-open or Published</u>	<u>Date patented or Granted</u>	<u>Priority Claimed</u>	
					<u>Yes</u>	<u>No</u>

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status(pending, abandoned, patented)</u>
XXXXXXXXXX	XXXXXXXXXX	XXXXXXXXXX


I hereby appoint Sally Daub, Reg. No. 41,478, and J. Gustav Larson, Reg. No. 39,263 as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith.

Please address all correspondence and direct all telephone calls to:

J. Gustav Larson
Simon, Fakhoury, Tangelos, Frantz & Galasso, PLC
P.O. Box 26503
Austin, Texas 78755-0503
Telephone: (512) 372-8240
Facsimile: (512) 372-8247

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

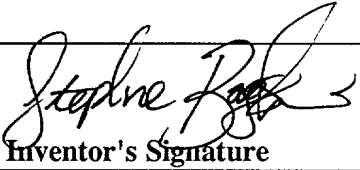1	Stephen A. Bagshaw		2000/09/22
	Full Name	Inventor's Signature	Date
	90 Kirk Drive		
	Thornhill, Ontario L3T 3L2, Canada		
	Residence (city, state, country)	Citizenship	
	Canada		
	Same as Residence Address		
	Post Office Address (include zip code)		

(FOR ADDITIONAL INVENTORS, check here ____ and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)